


Simple Network Configuration 2

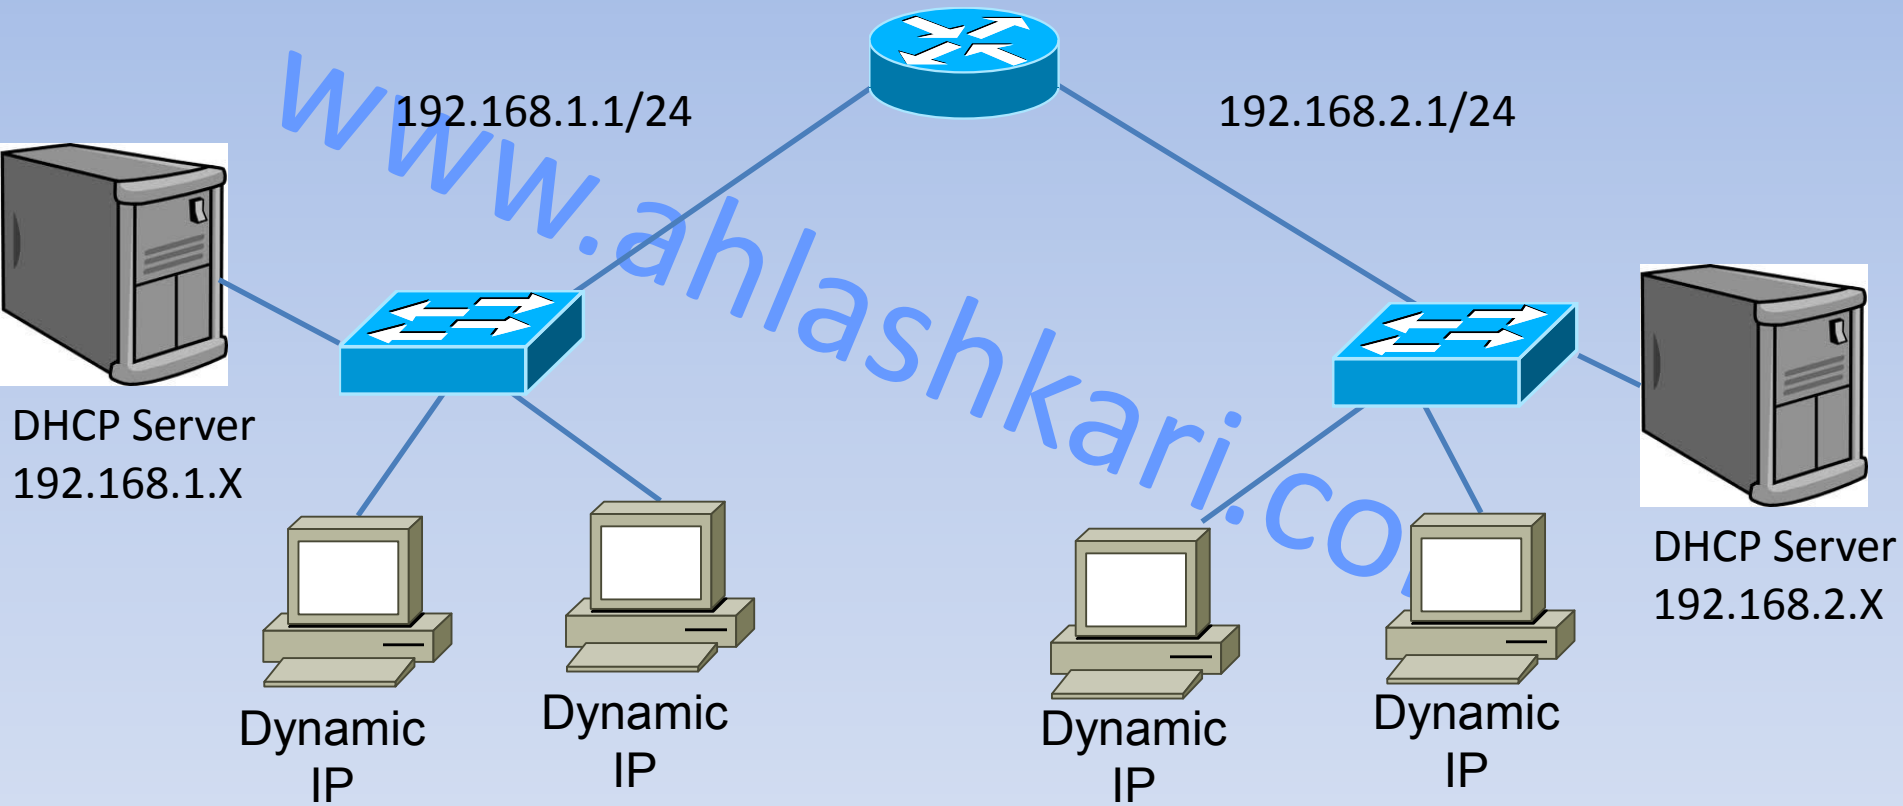

- Using **DHCP** server for support Dynamic IP
- Apply **static route** inside the router
- Perform **PING** to verify the connectivity
- Using **simulation mode** and capture the packets